




Cordless Impact Driver
DTD171



**4 assist mode
+
4 impact force
to improve
work
efficiency**



Max tightening torque

180 N·m




A-mode
(Assist mode)



Enhanced Anvil holder rigidity

Material change from Needle bearing to Ball bearing provides reduction of bit wobbling.

8 + Tightening modes and Memory function for various applications

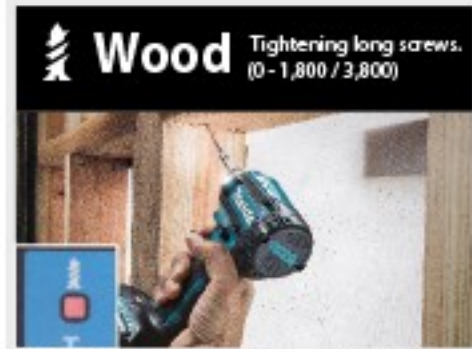

The tool drives a screw with low-speed rotation at first. After starting to impact, the rotation speed increases and reaches max speed.



This mode helps to prevent a bolt from falling off.




The tool stops rotating soon after impact starts.



This mode helps to prevent the screws from breakage and stripping.

(No load speed / Maximum blows (min⁻¹))

4 Changing the impact force (panel button)

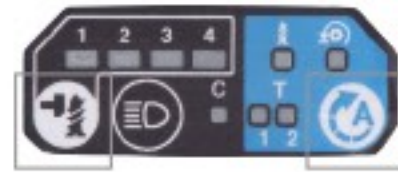

4 Assist mode (panel button)

Changing Impact force (body button)



Quick mode-switching function (body button)

Impact force change with one hand

The level of impact force changes every time you press the quick mode-switching button while holding the grip.




Memory function of impact mode is equipped.

If any two modes are registered in advance, you can switch to your desired mode by just pressing quick mode-switching button.

Example of Memory function of impact mode

If you register "hard impact mode" and "Teks thin" mode, you can switch from "hard impact mode" to "Teks thin" mode by just one click of the quick mode-switching button.

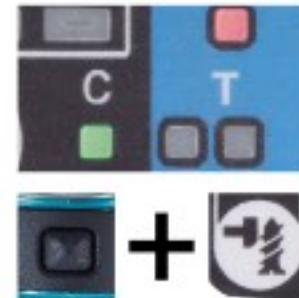

18V LITHIUM-ION

BL MOTOR XPT

Higher efficiency



Left-right twin LED job light

with preglow and afterglow functions

enhances the visibility by reducing the shade of a bit.



One-touch bit installation

Quick mode-switching button

Variable speed control by trigger



Accessory

NEW Plastic carrying case

High capacity with accessory storage case



You can lock a lid instantly by raising the handle.



Easy to drag out from narrow space owing to side recess.



Tool catcher set

Part No. 197043-2



enables to hook the machine quickly on a snap hook of waist belt.



Cordless Impact Driver DTD171

Variable Speed

Brake

Reversing

Built-in Job Light

Carrying Case

Capacity

Machine Screw	M4 - M8 (5/32" - 5/16")
Standard Bolt	M5 - M16 (3/16" - 5/8")
High Tensile Bolt	M5 - M14 (3/16" - 9/16")
Coarse thread (in length)	22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Max / Hard / Med / Soft / Wood / Bolt / T (1) / T (2) mode : 0 - 3,600 / 3,200 / 2,100 / 1,100 / 1,800 / 3,600 / 2,900 / 3,600
Impacts Per Minute (IPM)	Max / Hard / Med / Soft / Wood / Bolt / T (2) mode : 0 - 3,800 / 3,600 / 2,600 / 1,100 / 3,800 / 3,800 / 2,600
Max Fastening Torque	180 N·m (1,590 in.lbs.)
Fastening Torque	Hard / Med / Soft: 170 / 50 / 20 N·m (1,510 / 440 / 180 in.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 13.5 m/s ²
Sound Pressure Level	97 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	w/ BL1815M / BL1820B : 116x79x218mm (4-9/16"x3-1/8"x8-5/8") w/ BL1818B / BL1840B / BL1850B / BL1860B : 116x79x236mm (4-9/16"x3-1/8"x9-1/4")
Net weight	1.2 - 1.6 kg (2.7 - 3.4 lbs.)

Standard Equipment: Phillips Bit, Belt Clip, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EP04-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.



Drilling (Wood/Metal)
Accessories

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201810